


ACTIVE - LD

2 Trigger and 3 Modes of option with 32 bits LCD Display

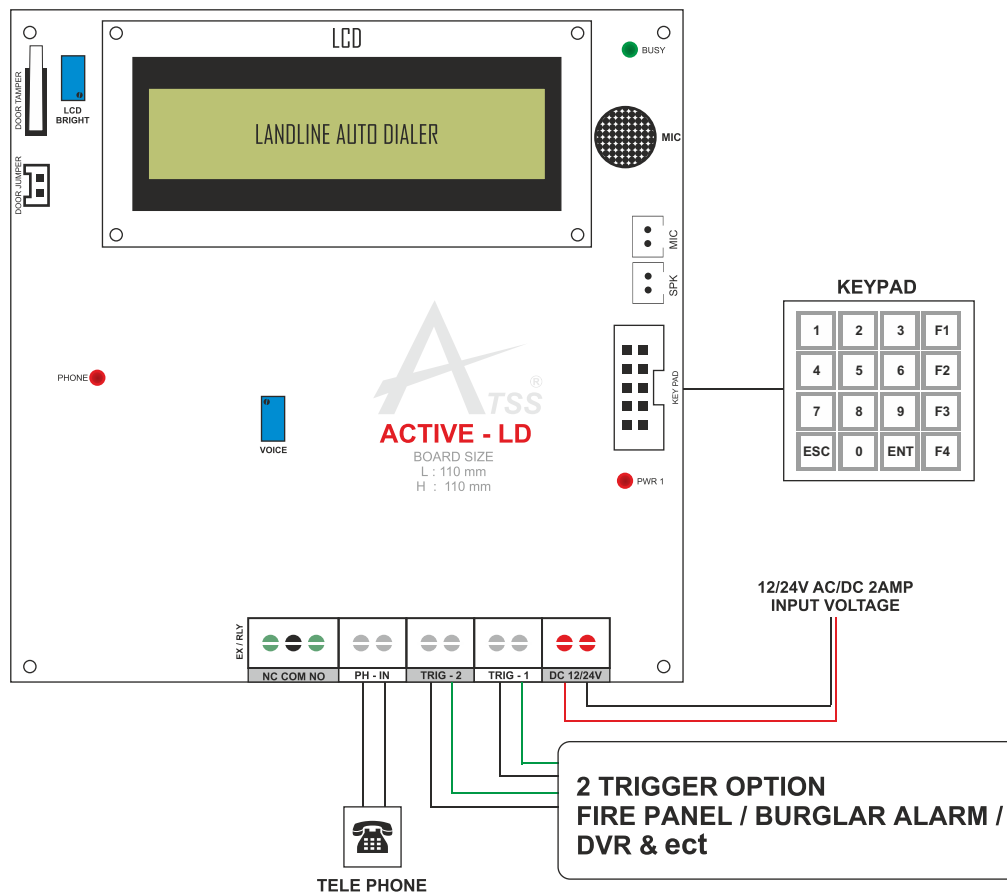

SPECIFICATION

POWER SUPPLY	
Maximum Power Consumption	12 Watts
DC /AC Main Supply	12-24 V/ 1 Amps
Minimum Phone Line Voltage	60-65 V
ZONES	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 1 kilo Ohm For Normally Closed
Max Output Voltage/ Current for Trigger Supply	12 V/500MA
Max Length of Trigger Cable (multi core cable)	150 m (Depends on cable resistance)
RELAY-NORMALLY CLOSED	
Max Voltage/ current ratings	AC 240 V/5 A
ENVIRONMENTAL	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0°C To 45°C
Storage Temperature	-20°C~ + 60°C
PHYSICAL	
Colour	Grey Coloured Metal Box
Control Panel Dimensions(mm)	(H X W X L) = 145 X 45 X 115
Weight	550 g